


SPECIFICATIONS

The 84 C Series linear ceiling system is either fixed directly to, or suspended from the structural soffit by adjustable hangers **6** (for internal use), and aluminium sub-structure, (for external use), the V4 and V5 carriers with pre-cut tongues at their bases provide a secure means of attachment for the ceiling panels **2** which are clipped securely onto the carrier and can be removed by hand. The tongue spacing on the carriers allow for 6mm and 16mm gaps between the panels for the insertion of closure profiles. A variety of trims are used to finish off the ceiling panels against the walls.

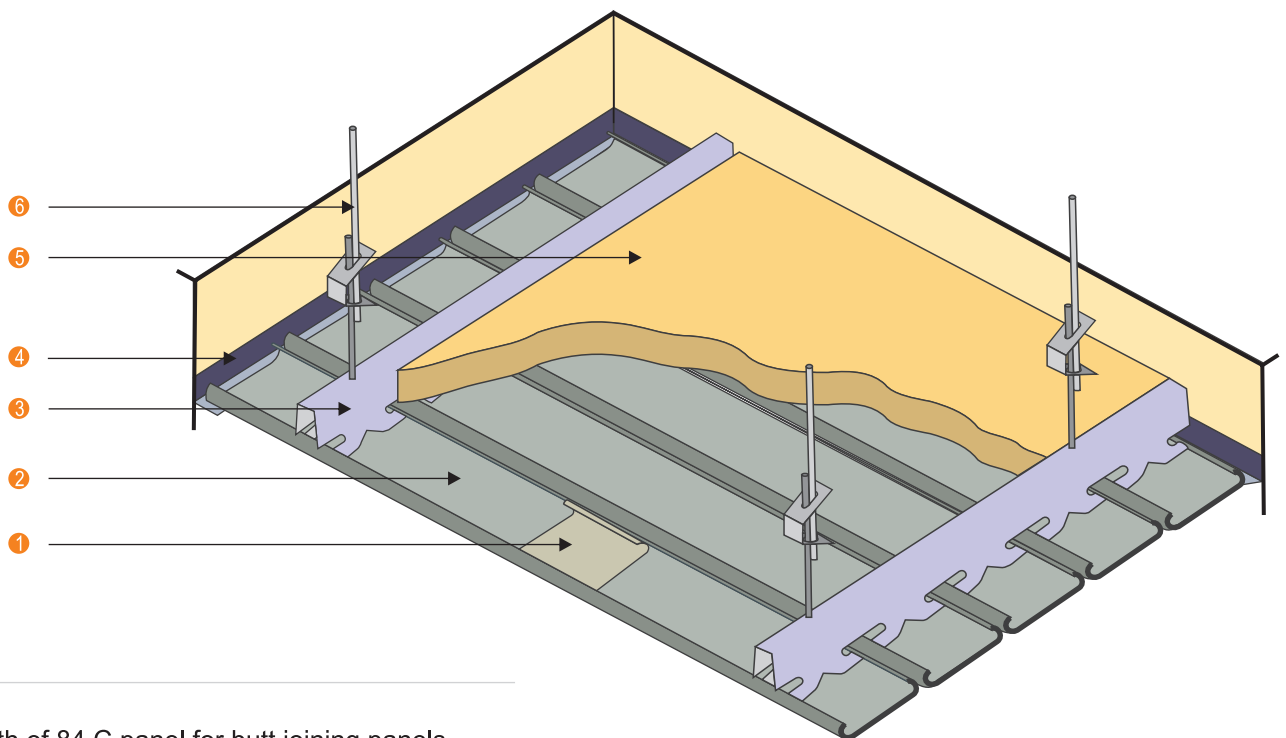

1
120mm Length of 84 C panel for butt joining panels.

2
Rollformed, pre-painted aluminium panels.

Aluminium Alloy: AA3004
 Gauge: 0.6mm
 Standard Length: 600 - 5000mm
 Other lengths subject to enquiry.
 Paint Finish: Colour-Tech G4

3
V4 Carrier
 Rollformed aluminium with tongues spacings (90mm module) to allow for a 6mm gap for the insertion of a recess closure profile.

Gauge: 0.9mm
 Finish: Colour-Tech G4 in marble white
 Standard Length: 5000mm

3
V5 Carrier
 Rollformed aluminium with tongues spacings (100mm module) to allow for a 16mm gap for the insertion of a recess closure profile or a flush closure profile.

Gauge: 0.9mm
 Finish: Colour-Tech G4 in marble white
 Standard Length: 5000mm

4
Perimeter angle trim.

5
Insulation / sound absorption blanket.

6
Butterfly suspension key hangers with 4mm diameter, galvanised rods, smooth and threaded.